

**PrecisionLine™ Series***Dual Technology Sensors***Overview**

PrecisionLine™ dual technology motion sensors offer new, easy solutions for your most challenging residential, pet, or commercial applications. Using a sophisticated combination of precision controlled microwave and passive infrared (PIR) technologies, these sensors give you total Coverage-on-Demand™.

PrecisionLine dual technology motion sensors reduce installation and training time since the installer is not required to make any complicated adjustments to the sensor. A jumper switch allows you to quickly select from a variety of precise range settings. Coverage-on-Demand ensures that the sensor detects only objects within a precise area, and not in adjacent rooms or outside—a common problem for less sophisticated dual technology sensors. With the RCR-PET model, each zone is factory calibrated to ignore animals up to 80 lbs, and still detect human-size objects.

The sensor works like sonar on a submarine, transmitting radar signals that “ping” the coverage area, then bounce back to the sensor on the same path. Objects that are out of the covered range are ignored. The sensor determines the attributes of an object by calculating its size and distance from the sensor. This allows it to ignore pets such as cats and dogs without any loss of detection.

For high security installations that require quicker detection, radar-only mode is available except in RCR-PET. Designed for flexibility, the PrecisionLine sensors are ideal solutions for a variety of challenging commercial and residential applications.

**Standard Features**

- **Exclusive range-control technology**
- **Use radar-only mode for stealth mounting in high security applications**
- **RCR-50 extended 50' range version**
- **RCR-PET ignores animals up to 80 lbs**

Model numbers**RCR-50, RCR-PET, RCR-A, RCR-C**

PrecisionLine™ Series

Dual Technology Sensors

Applications



Pharmacy
18' Range




Warehouse
50' Full Range




Restaurant
35' Full Range

Lens Coverage

RCR-50

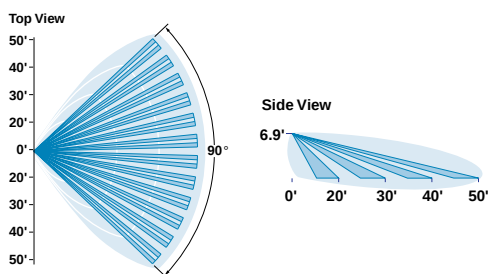

RCR-A, RCR-C, RCR-PET

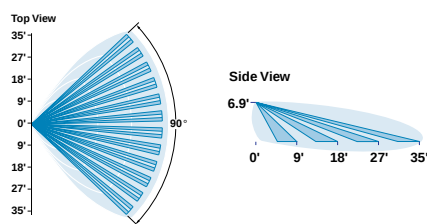

Coverage-on-Demand™ Advantage



PrecisionLine™ provides four distinct coverage zones, each with separate alarm thresholds. It recognizes only the reflections from objects within the coverage area. Outer zones can easily be turned off via a jumper switch.

Specifications

Dimensions

2.8 W x 2.3 D x 5.1" H
(7.1 x 5.8 x 13cm)

Color

White

Detection range

50' (15.2m) x 90°

35' (10.7m) x 90°

5.8GHz

Microwave Frequency

Mounting height

RCR-50, RCR-A, RCR-C

7-9' (2.1-2.7m)

RCR-PET

7-8' (2.1-2.4m)

Field wiring size

RCR-50, RCR-A, RCR-C

12-24AWG

RCR-PET

12-22AWG

Target velocity

0.5 ft/sec to 5 ft/sec

Alarm hold time

5 sec ± 10%

Environmental

Operating temperature

32° to 122°F (0° to 50°C)

Relative humidity

5-93% non-condensing

Electrical

Input voltage

8.5-18VDC (10-16VOL)

Typical current

27mA

Max current

35mA

Relay rating

28VDC, 100mA max

Range Settings

RCR-50

20, 30, 40, 50ft

RCR-A, RCR-C, RCR-PET

9, 18, 27, 35ft

Ordering Information

	Model	Description	Listing
NEW	RCR-50	50' PrecisionLine Dual Technology Motion Sensor, Form C relay, tamper, stealth mode	C-UL-US, FCC
NEW	RCR-PET	35' PrecisionLine Dual Technology Motion Sensor, Pet Immune up to 80lbs, Form A relay	C-UL-US, FCC
	RCR-A	35' PrecisionLine Dual Technology Motion Sensor, Form A relay, stealth mode	C-UL-US, FCC
	RCR-C	35' PrecisionLine Dual Technology Motion Sensor, Form C relay, tamper, stealth mode	C-UL-US, FCC



GE Security

www.GE-Security.com

2266 Second Street North
North Saint Paul, MN 55109
Phone: 651-777-2690
USA & Canada: 800-777-5484
Technical Service: 800-777-2624

12345 SW Leveton Drive
Tualatin, OR 97062
Phone: 503-692-4052
USA & Canada: 800-547-2556
Technical Service: 800-648-7424
Faxback: 800-483-2495