

Micro Door/ Window Sensor

Wireless, low-profile,
crystal technology



OVERVIEW

The UL approved Micro Door/Window Sensor is a completely wireless sensor that detects the opening and closing of doors and windows. The sensor's compact size provides for clean-looking installations; ideal for using on drawers, safes, cabinets and just about anything that can be opened and closed.

Powered by a 3VDC, lithium coin-cell battery and employing crystal technology for signal transmission, the Micro Door/Window Sensor has an estimated battery life of 5-8 years.*

The Micro Door/Window Sensor uses Learn Mode technology, enabling it to work with all Interlogix systems. Each sensor is given a unique identification code at the factory, a TX ID, which makes it possible to learn sensors into the panel remotely or before arriving at the job-site.

The Micro Door/Window Sensor is supervised, which means at least one time every 64 minutes a battery and sensor status signal is sent to the system's control panel. Supervised sensors provide system users the reassurance that sensors are working correctly.

STANDARD FEATURES

- Small size offers flexibility in applications with limited space
- Replaceable lithium coin-cell battery
- Crystal technology helps extend battery life
- Learn Mode technology provides wireless operation with Interlogix systems
- Low profile blends into decor
- Battery pull-tab design for quick and easy installation

**Actual battery life depends on how often the sensor is activated.*

Micro Door/ Window Sensor

Wireless, low-profile, crystal technology

North America
T 855-286-8889

Latin America
T 561-998-6114

Specifications

Battery	3VDC lithium coin-cell (CR2032)
Typical battery life	5–8 years*
Technology	Crystal
Transmitter frequency	319.5 MHz (crystal-controlled)
Supervisory interval	64 minutes (maximum)
Operating temperature	32°F (0°C) to 120°F (49°C)
Enclosure	ABS plastic
Sensor dimensions (LxWxD)	1.9 x 1.0 x 0.5 in. (4.7 x 2.5 x 1.3 cm)
Colors	White, Brown
Regulatory	UL, ULC, FCC, IC

*Actual battery life depends on how often the sensor is activated.


Ordering Information

TX-1012-01-1	Micro Crystal Door/Window Sensor, White
TX-1012-01-3	Micro Crystal Door/Window Sensor, Brown
TX-1012-01-1-25PKG	Micro Crystal Door/Window Sensor, White, 25-Pack

Accessories

60-699	3V 190 mAh Coin Lithium Battery, 10-Pack
600-745-1	Micro Door/Window Sensor Case, White, 10-Pack
600-745-3	Micro Door/Window Sensor Case, Brown, 10-Pack
600-729-1	Micro Accessory Pack w/Magnet, White, 10-Pack
600-729-3	Micro Accessory Pack w/Magnet, Brown, 10-Pack

Dimensional Diagram

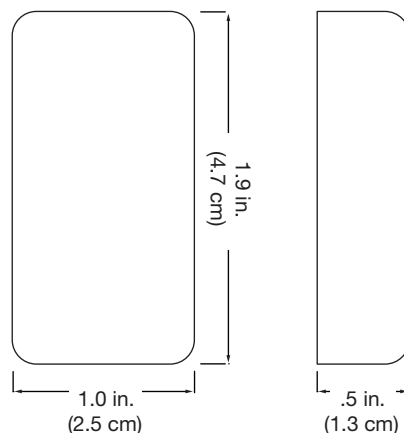

interlogix.com

Specifications subject to change without notice.

© 2013 United Technologies Corporation.

All rights reserved.

Interlogix is part of UTC Climate, Controls & Security,
a unit of United Technologies Corporation.

308-3724 2013/10 (75983)