



SC-502E

5-1/4" 2-way Round Loudspeaker
Poly Woofer with butyl rubber surround
Frequency Response: 50Hz - 20,000Hz
3/4" pivoting dome tweeter
Power Handling: 30 watts nom. 60 max.
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms
Perforated Metal Grille

Overall Dimensions:

7-1/2" round

Cut-out Dimensions:

6-1/2" round x 2-3/8" deep

Rough-In Kit / Vapor Dome:

RIR-5 / VPD-5

Sold in pairs



SC-602E

6-1/2" 2-way Round Loudspeaker
Poly Woofer with butyl rubber surround
Frequency Response: 45Hz - 20,000Hz
3/4" pivoting dome tweeter
Power Handling: 40 watts nom. 80 max.
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms
Perforated Metal Grille

Overall Dimensions:

8-3/8" round

Cut-out Dimensions:

7-3/8" round x 2-7/8" deep

Rough-In Kit / Vapor Dome:

RIR-6 / VPD-6

Sold in pairs



SC-802E

8" 2-way Round Loudspeaker
Poly Woofer with butyl rubber surround
Frequency Response: 35Hz - 20,000Hz
3/4" pivoting dome tweeter
Power Handling: 50 watts nom. 100 max.
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms
Perforated Metal Grille

Overall Dimensions:

9-3/4" round

Cut-out Dimensions:

8-5/8" round x 2-7/8" deep

Rough-In Kit / Vapor Dome:

RIR-8 / VPD-8

Sold in pairs



SC-62

6-1/2" 2-way Single Point Loudspeaker
Poly Woofer with butyl rubber surround
Frequency Response: 45Hz - 20,000Hz
3/4" Dual (left & right) tweeters
Mylar ferro-fluid cooled dome tweeters
Power Handling: 50 watts nom. 100 max.
both channels combined
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms nominal
Perforated Stainless-steel grille and screws
for high humidity environments

Overall Dimensions:

8-3/8" round

Cut-out Dimensions:

7-3/8" round x 2-7/8" deep

Rough-In Kit / Vapor Dome:

RIR-6 / VPD-6

Sold in eaches



SE-691E

5-1/4" 2-way Rectangular Loudspeaker
Poly Woofer with butyl rubber surround
Frequency Response: 50Hz - 20,000Hz
1" pivoting dome tweeter
Power Handling: 30 watts nom. 60 max.
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms
Perforated Metal Grille

Overall Dimensions:

6-5/8" W x 9-1/4" H

Cut-out Dimensions:

5-9/16" W x 8-1/4" H x 2-3/8" D

Rough-In Kit

RI-6914

Sold in pairs



SE-791E

6-1/2" 2-way Rectangular Loudspeaker
Poly Woofer with butyl rubber surround
Frequency Response: 45Hz - 20,000Hz
1" pivoting dome tweeter
Power Handling: 40 watts nom. 80 max.
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms
Perforated Metal Grille

Overall Dimensions:

8-5/8" W x 12-1/8" H

Cut-out Dimensions:

7-3/8" W x 10-7/8" H x 3-1/8" D

Rough-In Kit

RIB-7

Sold in pairs



SE-891E

8" 2-way Rectangular Loudspeaker
Poly Woofer with butyl rubber surround
Frequency Response: 35Hz - 20,000Hz
1" pivoting dome tweeter
Power Handling: 50 watts nom. 100 max.
Sensitivity: 91dB 1 watt / 1 meter
Impedance: 8 ohms
Perforated Metal Grille

Overall Dimensions:

10-1/2" W x 14-1/2" H

Cut-out Dimensions:

9" W x 13" H x 2-15/16" D

Rough-In Kit / Vapor Dome:


RIB-82 / VPD-82

Sold in pairs

Frameless Loudspeakers

SC-602f
6-1/2" In-Ceiling / Wall

SC-802f
8" In-Ceiling / Wall

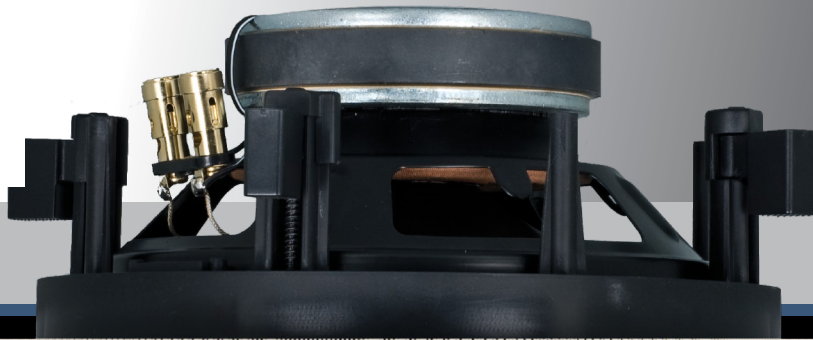

- Perforated Metal Grille
- Magnetically-Attached Stainless Grille
- Grille may be painted to match mounting surface
- Dog Ear Mounting
- Polypropylene woofer with butyl rubber surround
- Sold and Shipped in Pairs

SC-602f

- **6-1/2" 2-way Loudspeaker**
- Frequency Response: 45Hz - 20kHz $\pm$ 3 dB
- Power Handling: 40 watts nom. 80 max.
- Sensitivity: 91dB 1 watt / 1 meter
- Impedance: 8 ohms nominal
- Tweeter: 3/4" pivoting dome tweeter
- Cut-out dimensions: 7-1/4" dia. x 3-3/8" deep
- Overall dimensions: 8-7/16" dia.

SC-802f

- **8" 2-way Loudspeaker**
- Frequency Response: 35Hz - 20kHz $\pm$ 3 dB
- Power Handling: 50 watts nom. 100 max.
- Sensitivity: 91dB 1 watt / 1 meter
- Impedance: 8 ohms nominal
- Tweeter: 3/4" pivoting dome tweeter
- Cut-out dimensions: 8-5/8" dia. x 3-7/8" deep
- Overall dimensions: 9-7/8" dia.



SC-602f - Sold & shipped with round frameless grilles (optional square grilles available)



SC-802f - Sold & shipped with round frameless grilles (optional square grilles available)



optional pre-construction bracket & vapor dome

