


---

# INSTALLATION INSTRUCTIONS

---

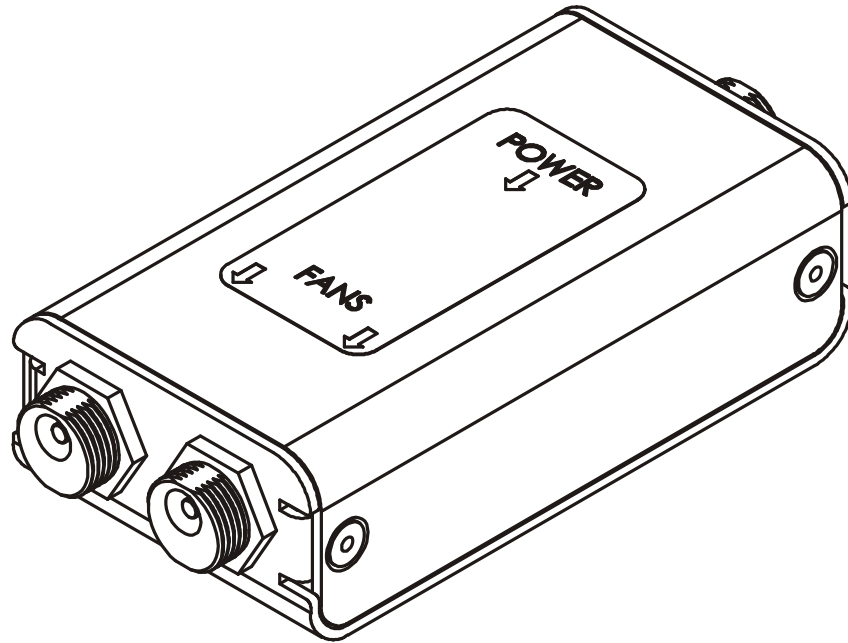

---

## Thermostat Control

---

## DISCLAIMER

Milestone AV Technologies and its affiliated corporations and subsidiaries (collectively "Milestone"), intend to make this manual accurate and complete. However, Milestone makes no claim that the information contained herein covers all details, conditions or variations, nor does it provide for every possible contingency in connection with the installation or use of this product. The information contained in this document is subject to change without notice or obligation of any kind. Milestone makes no representation of warranty, expressed or implied, regarding the information contained herein. Milestone assumes no responsibility for accuracy, completeness or sufficiency of the information contained in this document.

Chief® is a registered trademark of Milestone AV Technologies. All rights reserved.



## IMPORTANT WARNINGS AND CAUTIONS!



**WARNING:** A WARNING alerts you to the possibility of serious injury or death if you do not follow the instructions.






**CAUTION:** A CAUTION alerts you to the possibility of damage or destruction of equipment if you do not follow the corresponding instructions.



**WARNING:** Failure to read, thoroughly understand, and follow all instructions can result in serious personal injury, damage to equipment, or voiding of factory warranty! It is the installer's responsibility to make sure all components are properly assembled and installed using the instructions provided.


## DIMENSIONS

SUPPLY VOLTAGE: 12VDC 30W MAX  
MAX NUMBER OF CONTROLLED DEVICES: 2  
OPERATION: FAN UNITS ARE POWERED WHEN DEVICE REACHES 85°F  
FAN UNITS ARE TURNED OFF WHEN DEVICE REACHES 75°F

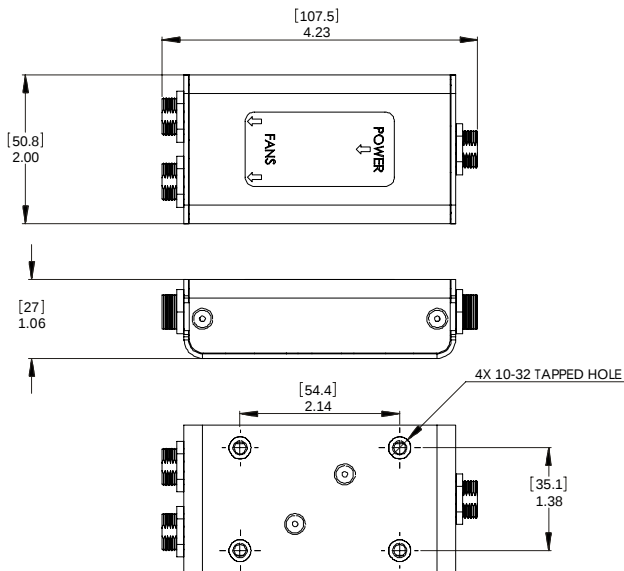

DIMENSIONS: [MILLIMETERS]  
INCHES


## PARTS INCLUDED

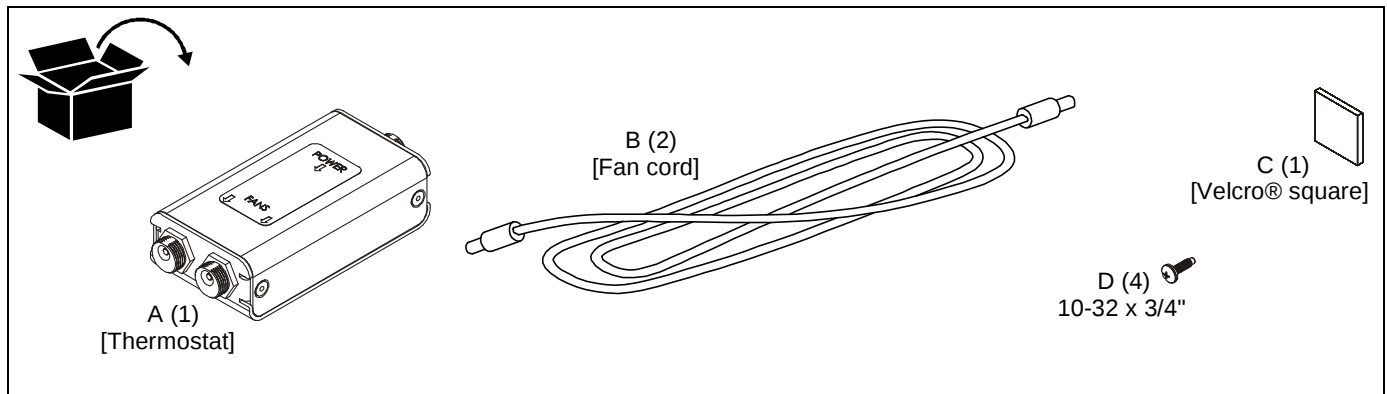


## INSTALLATION

**NOTE:** The NAFT85 thermostat control will power the fan unit(s) when the device reaches 85°, and will turn off fan(s) when device temperature drops to 75°. See the specific installation instructions provided with the rack for additional installation information.

1. Plug fan cord(s) (B) into the thermostat (A) following label located on thermostat. (See Figure 1)
2. Plug fan cord(s) into back of fan panel(s).
3. Plug power supply cord into opposite end of thermostat (A). (See Figure 1)

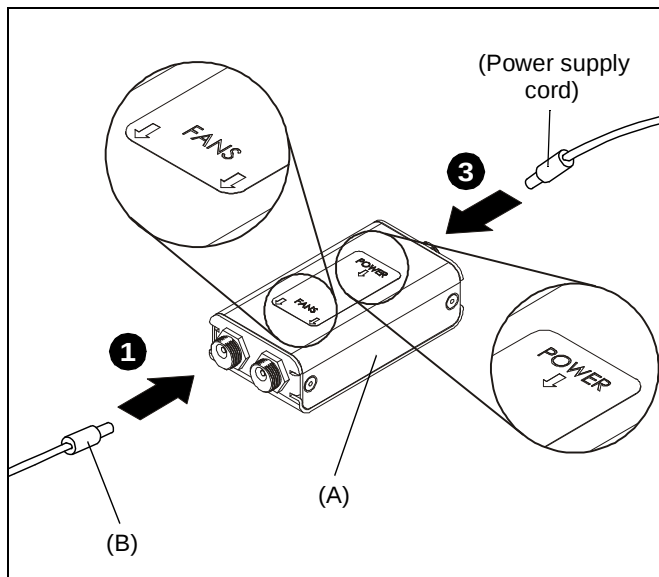

**Figure 1**

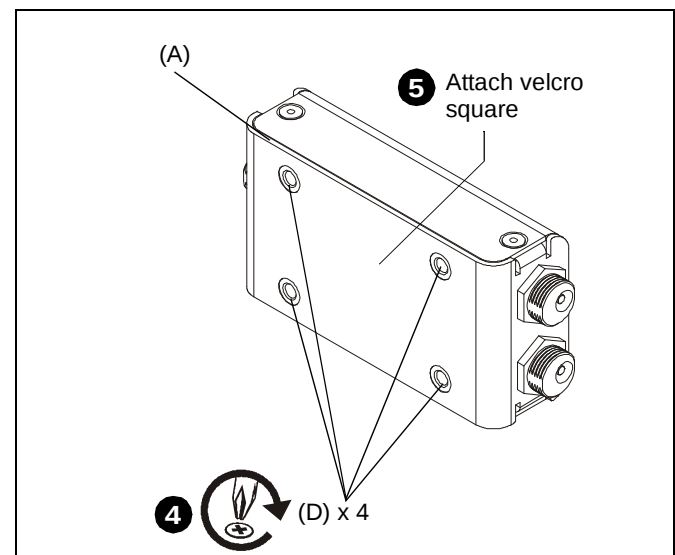

**Figure 2**

6. Plug the power supply into an available outlet.
7. Complete the installation following the rack installation instructions.

4. OPTIONAL: The thermostat may be fastened at any location within the rack using four 10-32 x 3/4" header point Phillips screws (D) (See Figure 2)
5. OPTIONAL: The thermostat may be fastened at any location within the rack using one Velcro square (C). (See Figure 2)



Our Mounts. **Your Vision.**

Chief Manufacturing, a products division  
of Milestone AV Technologies

8821-002004 Rev00  
©2010 Milestone AV Technologies, a  
Duchossois Group Company  
[www.chiefmfg.com](http://www.chiefmfg.com)  
09/10

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>USA/International</b> | <b>A</b> 8401 Eagle Creek Parkway, Savage, MN 55378<br><b>P</b> 800.582.6480 / 952.894.6280<br><b>F</b> 877.894.6918 / 952.894.6918                     |
| <b>Europe</b>            | <b>A</b> Fellenoord 130 5611 ZB EINDHOVEN, The Netherlands<br><b>P</b> +31 (0)40 2668620<br><b>F</b> +31 (0)40 2668615                                  |
| <b>Asia Pacific</b>      | <b>A</b> Office No. 1 on 12/F, Shatin Galleria<br>18-24 Shan Mei Street<br>Fotan, Shatin, Hong Kong<br><b>P</b> 852 2145 4099<br><b>F</b> 852 2145 4477 |

