

Wireless Video Door Phone

DP-236Q

Introducing the **ENFORCER®** Wireless Video Door Phone: the handheld home entry solution. Observe visitors on the large 3 $\frac{3}{8}$ " screen as they arrive, communicate with them, take photos for later viewing, and unlock a gate to grant entry – all from the wireless monitor. Use up to three monitors for viewing anywhere in the home. And with the camera's wide 170° viewing angle, you don't have to compromise on convenience or security.

Features:

- Talk with visitors and unlock doors or gates via the monitor
- Handheld monitor's rechargeable battery allows convenient communication with visitors while moving around the premises
- Wide 3 $\frac{3}{8}$ " monitor screen for enhanced viewing
- Connect up to two additional monitors (sold separately)
- Includes a kickstand and charging base for the monitor
- Egress input allows the door phone to be connected with a Request-to-Exit Plate or other egress device
- 9–16 VAC/VDC Operation – connects to most doorbell circuits
- Adjustable lens for a wide variety of viewing angles
- Camera's built-in PIR sensor takes photos of approaching visitors
- Up to 100 images can be stored in memory
- Camera has built-in LEDs for nighttime operation
- Camera is IP55 rated for outdoor use
- Tamper switch triggers alarm if camera is removed from its base
- Four programmable doorbell tones

Specifications:

Camera	
Type	Color Camera
Chip	CMOS
Resolution	480 TV Lines
Lens	2mm
Viewing angle	170°
Operating voltage	9–16 VAC/5–16 VDC
Relock delay	1–6 s
Relay output	3A@250VAC/30VDC
Current draw	Active 250mA@4.2VDC
	Standby 3mA@4.2VDC
Battery life	Active 4.4 Hours
	Standby 366 Hours (15 days)
PIR Detection range	9' (3m)
PIR Detection angle	138°
Dimensions	5 $\frac{11}{16}$ "x3 $\frac{3}{8}$ "x1 $\frac{15}{16}$ " (144x80x50 mm) with bracket
Weight	4.3-oz (122g)
Operating temperature	14°–122° F (-10°–50° C)



Unlocks Doors

Allows access remotely via the monitor



Wireless Operation

Range: Up to 492ft (150m)*



1 Camera, 3 Monitors

Pair up to three monitors with one camera



Adjustable Viewing Angle

Larger variety of viewing angles

Monitor	
Display	3 $\frac{3}{8}$ " (86mm) TFT
Operating voltage	5VDC (adapter) or 3.7VDC (battery)
Current draw	Active 220mA@4.2VDC
	Standby 5mA@4.2VDC
Battery life	Active 4.4 Hours
	Standby 220 Hours (9 days)
Operating frequency	2410.875–2471.625MHz
RF Power	120mW
Wireless range	492' (150m)*
Dimensions	5"x3 $\frac{3}{8}$ "x7 $\frac{1}{8}$ " (127x85x22 mm)
Weight	3.9-oz (110g)
Operating temperature	32°–104° F (0°–40° C)

*Line-of-sight range. Actual range may vary depending on the installation and operating environment.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved.


The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBASLI®


PI_DP-236Q_150528.docx

Wireless Video Door Phone

Overview:

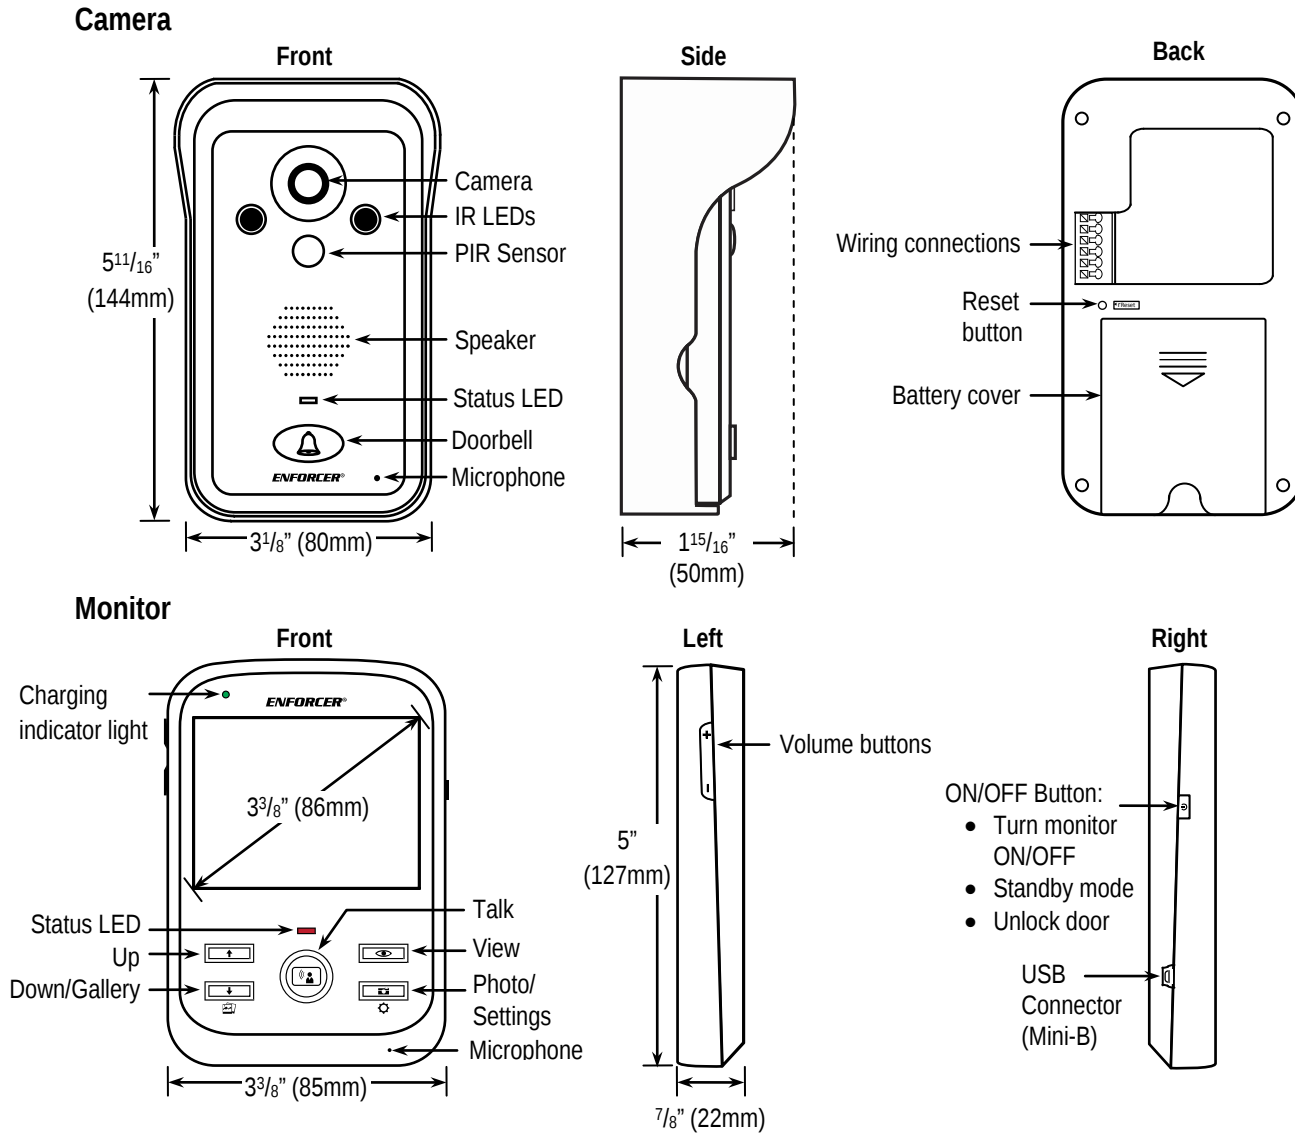

Sample Connector Wiring:

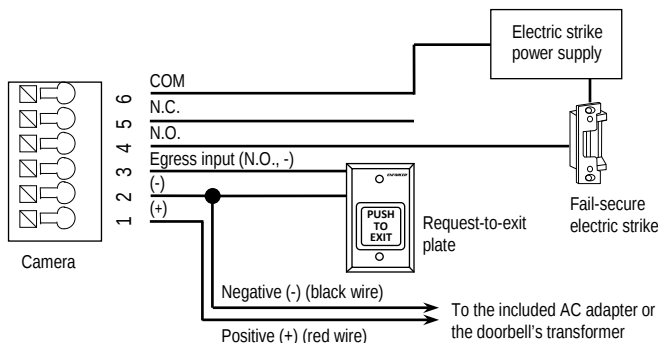

Optional Accessories:

DP-236-MQ <i>Additional Monitor</i>	
DP-236-BQ <i>Replacement battery</i>	

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved.
 The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI_DP-236Q_150528.docx