

IP Corner Mount Camera

EV-N4206-2S4Q


Features:

- 1/2.9" 2.43M Sony CMOS
- H.264/MJPEG, Dual Stream IP Camera
- Max. 30FPS/Full HD (1920x1080)
- Remote access via web browser
- Network Bandwidth Control
- Event Alarm, E-mail, FTP Function
- ONVIF Profile S
- 30 Covert IR LEDs for discreet monitoring in the dark
- True Day & Night function with ICR mechanism
- Vandal-resistant metal front panel
- 1-Way audio (optional)
- 12VDC, PoE (IEEE802.3af)



*This **ENFORCER** IP Corner-Mount Camera has a discreet, low-profile appearance and a wide-angle lens, making it perfect for elevators and office corners.*


Sample Application:

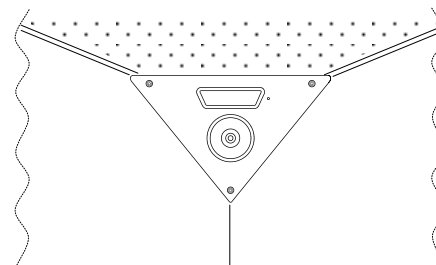

Specifications:

Type	Corner-Mount Camera	
Sensor	1/2.9" 2.43M Sony CMOS	
Video encoding	H.264, MJPEG	
Resolution	1920x1080, 1280x720, 1024, 640x480, 320x240, 160x120	
DNR	2D-NR	Yes
	3D-NR	No
DWDR	Yes	
Scanning system	Progressive 1080p	
# of IR LEDs	30 (940nm)	
Lens	2.9mm	
Viewing angle	135°	
Minimum illumination	0.002 Lux (F/1.8)	
Gamma correction	0.45	
S/N ratio	40dB	
Gain control	Auto	
White balance	Auto	
Operating voltage	12VDC, PoE 802.3af	
Current draw	180mA	
IP Rating	IP65	
Operating temperature	14°~122° F (-10°~50° C)	
Dimensions	7 1/2" x 5 1/2" x 1 11/16" (190x140x43 mm)	
Weight	13.75-oz (390g)	

Dimensions:

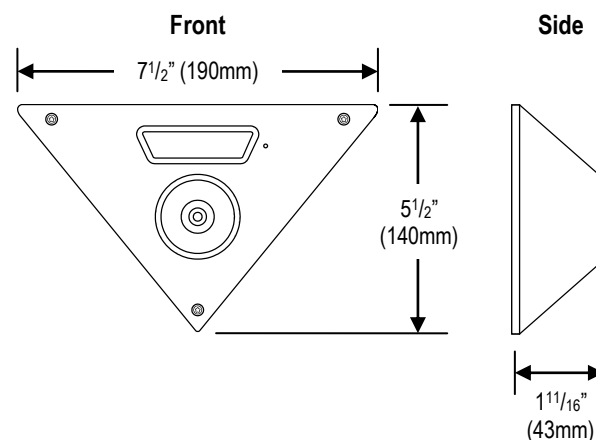**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

Copyright 2016 © SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI_EV-N4206-2S4Q_160629.docx